

RM116

1U Computing-Oriented Server Chassis




RM11602

Rear View




Inside View

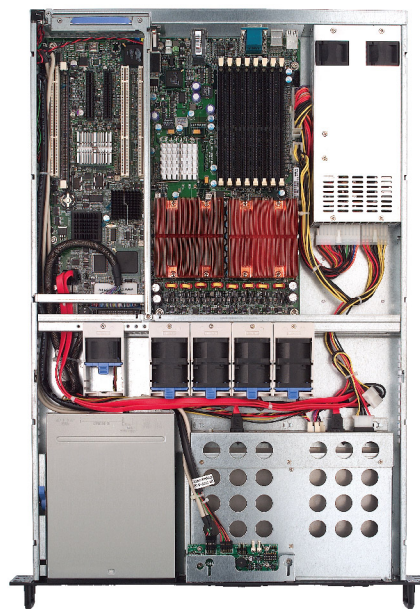

Front View



RM11602



Optional 6Gb/s SATA backplane



Up to tool-less 6 x middle 40 mm fans



Tool-less Lock for 5.25" bay



Easy-assembly PCI riser bracket

Features & Benefits

- Support M/B up to 12"x 13"
- Support 6Gb/s 2-Port SATA backplane
- Adjustable fan holder to align with CPU location
- Tool-less design on top cover and ODD installation
- Support 1U single PSU

Specification

Model Name	• RM11602
M/B Form Factor	• Extended ATX(12"x13")
Dimension (D×W×H)	• 660x 430x 43.5(mm), 26"x16.9"x1.7"
Drive Bay	• Exposed: 5.25"x 1, Internal: 3.5"x2
PSU Form Factor	• 1U Single
Indicator	• 1x Power Status, 1x HDD Activity, 2x LAN Activity • 1x Fan Failure & Overheat
Front Control	• Power On/Off, Alarm Mute, System Reset, 2xUSB2.0
System Security	• Intrusion Switch
Cooling Fan	• Middle: 4x40mm (T=48mm)+1x40mm(T=28mm) • Rear: N/A
Slot Opening	• 1x Full Height & Length
HDD Backplane	• 6Gb/s SATA
Metal Thickness	• 1.2mm
Net Weight (chassis only)	• 7.4Kg
Gross Weight (w/Packing)	• 10.6Kg
Front Bezel	• Option
Cubic Feet	• 3.3
Container Info. (Single Packing)	• 20': 336, 40': 682, 40'H: 796

Optional Items

	Order Code	Description
Storage Kits	◆ Note1.	2.5" or 3.5" HDD Storage Kits
Backplane	84H311610-083	2-Port 6Gb/s SATA, w/mounting bracket (Page.77)
Slide Rail	84H311710-001	26", Ball Bearing (Page.78/79)
	84H331610-082	26", Ball Bearing, Tool-less
Riser Card	80H09312406A0	1-slot, PCI-e 16x (Page.76)
	80H09313701A0	1-slot, PCI-e 8x
Bezel	88H311800-004	1U, Plastic (Stripe) (Page.75)
	84H311710-014	1U, Plastic (SilFox)
	84H311710-030	1U, Plastic (Net)
◆ Note1. SK41203 (Page.62) / SK41101 (Page.64)		

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Please refer above of information from CHENBRO web)

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM11602T	12"x13"	SAS/SATAII	4x4048+1x4028	1x FF	Option	Option
RM11602T2	12"x13"	6Gb/s SATA	4x4048+1x4028	1x FF	Option	Option

RM117



1U High Storage Density Server Chassis



Rear View




Inside View

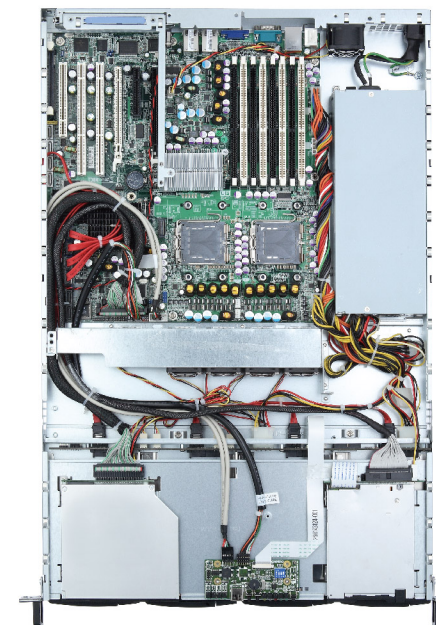


Optional 6Gb/s SATA backplane



Tool-less installation for slim ODD




Up to 6 x middle 40 mm fans



Optional 6Gb/s Mini-SAS backplane



Tool-less installation for slim FDD Or 2.5" HDD kit



Enforcing rear fan

Features & Benefits

- Support M/B up to 12"x 13"
- Support 6Gb/s 4-Port mini-SAS backplane
- Support up to 6pcs middle fans and 1pcs exhausted fan
- Tool-less design on top cover, FDD and ODD installation
- Support 1U single PSU
- Compatible with SK51102 in ODD bay

Specification

Model Name	• RM11704M
M/B Form Factor	• Extended ATX(12"x13")
Dimension (D×W×H)	• 660x 430x 43.5(mm), 26"x16.9"x1.7"
Drive Bay	• Exposed: 1x Slim ODD, 8x2.5" Hot-swap HDD
PSU Form Factor	• 1U Single
Indicator	• 1x Power Status, 1x HDD Activity, 2x LAN Activity • 1x Fan Failure & Overheat
Front Control	• Power On/Off, Alarm Mute, System Reset, 1xUSB2.0
System Security	• Intrusion Switch
Cooling Fan	• Middle: 5 or 6x40mm (T=48mm) • Rear: N/A
Slot Opening	• 1x Full Height & Length
HDD Backplane	• 6Gb/s SATA or Mini-SAS
Metal Thickness	• 1.2mm
Net Weight (chassis only)	• 6.5Kg
Gross Weight (w/Packing)	• 9.6Kg
Front Bezel	• Option
Cubic Feet	• 3.33
Container Info. (Single Packing)	• 20': 336, 40': 682, 40'H: 796

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM11704M	12"x13"	Mini-SAS	4x4048+2x4028	1x FF	Option	Option
RM11704M2	12"x13"	6Gb/s Mini-SAS	4x4048+2x4028	1x FF	Option	Option

Optional Items

	Order Code	Description
Storage Kits	◆ Note1.	2.5" or 3.5" HDD Storage Kits
Backplane	84H311710-084	4-Port 6Gb/s mini-SAS, w/mounting bracket (Page.77)
	84H312410-044	4-Port 6Gb/s SATA, w/mounting bracket
Cable	26H113215-030	SFF-8087 to SFF-8087, 600mm
Slide Rail	84H311710-001	26", Ball Bearing (Page.78/79)
	84H331610-082	26", Ball Bearing, Tool-less
Riser Card	80H09312406A0	1-slot, PCI-e 16x (Page.76)
	80H09313701A0	1-slot, PCI-e 8x
Bezel	88H311800-004	1U, Plastic (Stripe) (Page.75)
	84H311710-014	1U, Plastic (SilFox)
	84H311710-030	1U, Plastic (Net)
◆ Note1. SK51101 / SK51102 (Page.62)		

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Please refer above of information from CHENBRO web)