

RM217


2U General Purpose Server Chassis



Rear View




Inside View

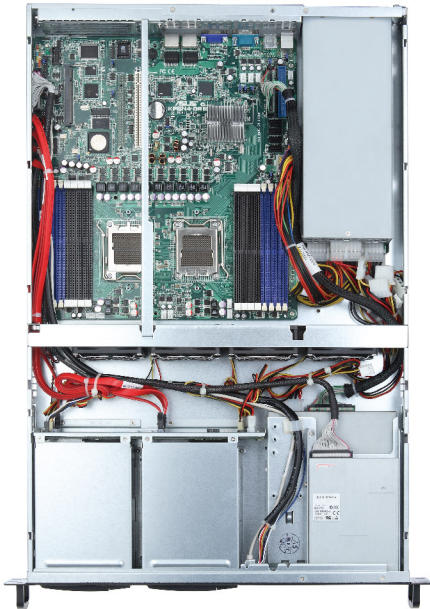

Front View



RM21706

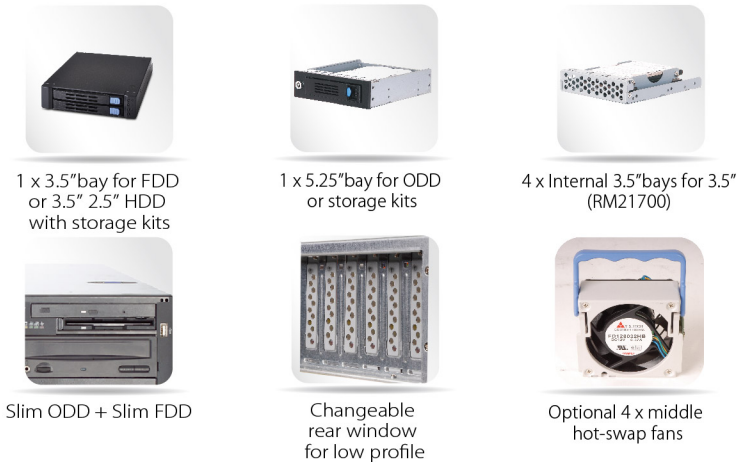

Features & Benefits

- Support M/B up to 12"x13"
- Support 6Gb/s mini-SAS and SATA backplanes
- Versatile configuration available via exposed 1x5.25" and 1x3.5" bays
- Optional 4x Hot-swap fan module
- Support 3-slot and 6-slot LP rear windows
- Support 2U Single and 1+1 Redundant PSU

Specification

Model Name		• RM21700 / 21706
M/B Form Factor		• Extended ATX(12"x13")
Dimension (D×W×H)		• 660x 430x 88(mm), 26"x16.9"x3.5"
Drive Bay		• Exposed: 1x5.25", 1x 3.5" Internal: 4x 3.5"(RM21700)
PSU Form Factor		• 2U Single or 1+1 Redundant
Indicator		• 1x Power Status, 1x HDD Activity, 2x LAN Activity • 1x Fan Failure & Overheat
Front Control		• Power On/Off, Alarm Mute, System Reset, 1xUSB2.0
System Security		• Intrusion Switch
Cooling Fan		• Middle: 4x80mm (RM21706), 3 (RM21700) • Rear: 2x40mm (Option)
Slot Opening		• 3x Full Height & Length or 6x Low Profile
HDD Backplane		• 6Gb/s SATA & Mini-SAS
Metal Thickness		• 1.2mm
Net Weight (chassis only)		• 9.5Kg
Gross Weight (w/Packing)		• 13.4 Kg
Front Bezel		• Option
Cubic Feet		• 4.26
Container Info.(Single Packing)		• 20': 250, 40':520, 40'H:575

Optional Items

	Order Code	Description
Storage Kits	◆ Note1.	2.5" or 3.5"HDD Storage Kits
Bracket	84H321410-018	For C2W-5820V/5620V
PCB	84H331410-025	Chassis Management Board
Backplane	84H321710-042	1x 6-Port 6Gb/s SATA, w/Mounting Bracket (Page.77)
	84H321710-043	1x 6-Port 6Gb/s mini-SAS, w/Mounting Bracket
Cable	26H113215-030	SFF-8087 to SFF-8087, 600mm
Slide Rail	84H321510-022	26", Ball Bearing (Page.78/79)
	84H321710-041	26", Ball Bearing, Tool-less
Riser Card	80H09323201B0	2U 2-Slot, 1x PCI-e 16x+ 1x PCI-X w/100mm cable link
	80H09323202B0	2U 2-Slot, 1x PCI-e 16x+ 1x PCI-X (Dummy) (Page.76)
Fan	84H321710-010	40mm, 3P3C, L300mm, w/screws
Bezel	88H321500-001	2U, Plastic(Stripe) (Page.75)
	84H321410-033	2U, Plastic(SilFox)
	84H321410-049	2U, Plastic(Net)
	84H321510-076	2U, Plastic(Bricker)
◆ Note1. SK51101 / SK51102 / SK41203 (Page.62)		

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Please refer above of Information from CHENBRO web)

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM21700-L	12"x13"	N/A	3x8025	6x LP	Option	Option
RM21706T-L	12"x13"	SAS/SATAII	4x8032	6x LP	Option	Option
RM21706T2-L	12"x13"	6Gb/s SATA	4x8032	6x LP	Option	Option
RM21706T	12"x13"	SAS/SATAII	4x8032	3x FF	Option	Option
RM21706T2	12"x13"	6Gb/s SATA	4x8032	3x FF	Option	Option

RM223


2U Cost-Effective Industrial Server Chassis



Rear View



Inside View

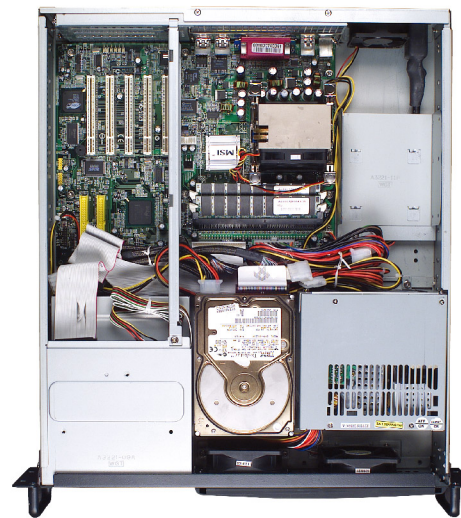

Features & Benefits

- Support M/B up to 12"x9.6"
- Support 3-slot and 6-slot LP rear windows
- Whole chassis with black coating for tough environment
- 4x internal 3.5" HDD bays with dedicated fan cooling
- Built-in easy-swap air filter
- Support single PS/2 PSU in 2U form factor

Specification

Model Name		• RM22300
M/B Form Factor		• ATX(12"x9.6")
Dimension (D×W×H)		• 493x 422x 88(mm), 19.4"x16.6"x3.5"
Drive Bay		• Exposed: 1x5.25", 1x 3.5"; Internal: 4x 3.5"
PSU Form Factor		• PS/2 Single
Indicator		• 1x Power Status, 1x HDD Activity, 1x LAN Activity
Front Control		• Power On/Off, System Reset
System Security		• Intrusion Switch
Cooling Fan		• Front: 2x80mm (T=25mm) • Rear: 1x60mm (T=25mm)
Slot Opening		• 3x Full Height or 6x Low Profile
HDD Backplane		• N/A
Metal Thickness		• 1.2mm
Net Weight (chassis only)		• 7.0Kg
Gross Weight (w/Packing)		• 10.0 Kg
Front Bezel		• Option
Cubic Feet		• 3.03
Container Info.(Single Packing)		• 20': 324, 40':678, 40'H:829

Optional Items

	Order Code	Description
Storage Kits	◆ Note1.	2.5" or 3.5"HDD Storage Kits
Slide Rail	84H322310-005	22", Ball Bearing (Page.78/79)
Bezel	88H321510-001	2U, Plastic(Stripe) (Page.75)
	84H322310-001	2U, Plastic(SilFox)
◆ Note1. SK51201 (Page.62) / SK31101 / SK41101 / SK41201 (Page.64)		

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Please refer above of Information from CHENBRO web)

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM22300	12"x9.6"	N/A	2x8025+1x6025	3x FH	Option	Option
RM22300-L	12"x9.6"	N/A	2x8025+1x6025	6x LP	Option	Option