



Chassis Quick Reference

Major Components

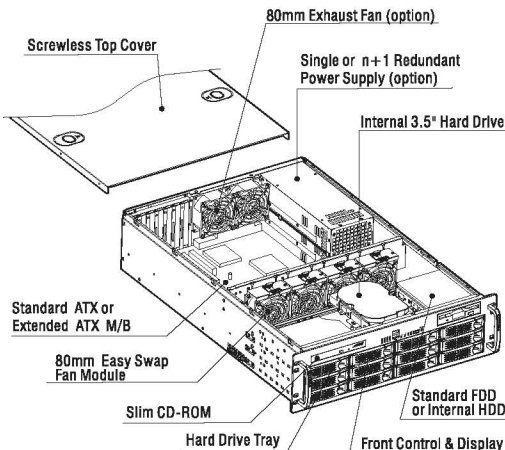


Front Panel Controls and Indicators


- A. HDD Tray Activity LED
- B. USB 2.0 Port
- C. System Reset Button
- D. Alarm Mute button
- E. System HDD Activity LED
- F. Power LED
- G. Failure LED
- H. LAN1 & LAN2 LED
- I. Power Switch



Rear Window Configuration

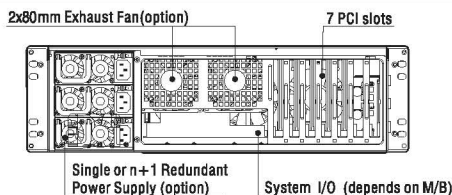


Top Cover Opening




This unit must be operated with the chassis TOP COVER installed to ensure proper cooling

Installing Hard Drive

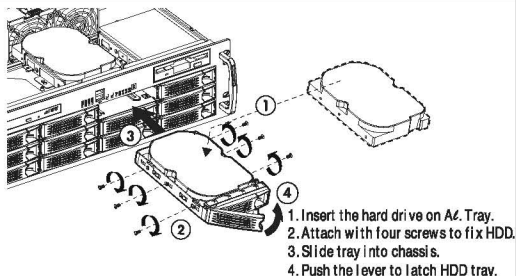


Removing Fan Module & Installing Exhaust Fan, Power Supply

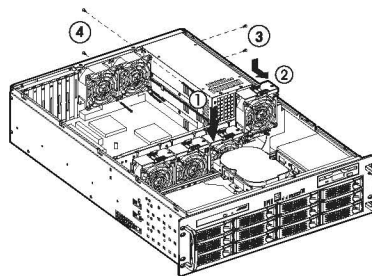

1. Moving the latch until hook releasing
2. Pull up fan module then fan board disconnecting.
3. Attach with 6pcs screws for power supply
4. Attach with 8pcs screws for two exhaust fans

Installing Slim CD-ROM


1. Release screw then move back and take out bracket
2. Attach with two screws for adapter
3. Attach with four screws to fit slim CD-ROM on bracket

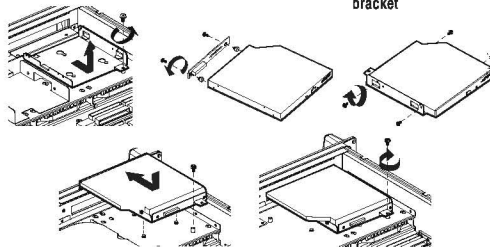

4. Fit to three gauge pins and move forward until fasten
5. Attach back original screw



Installing Internal HDD & FDD

1. Release screw then move back and take out bracket
2. Attach with four screws to fit HDD/FDD on bracket
3. Fit to two gauge pins and move forward until fasten
4. Attach back original screw

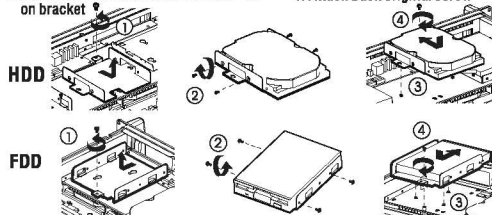

Installing Backplane Assembly

1. Attach with 6 stand-offs on bracket location with "S" mark.
2. Attach with 4 screws for each backplane assembly.
3. Place backplane assembly along internal backplane guide rail.
4. Attach with 3 screws on both sides of chassis.



364.0 mm