


R164-S32-AAH1

Rack Server - 1U UP 12-Bay NVMe/SATA

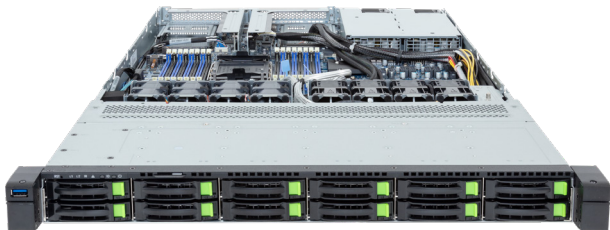

Key Features

- Single Intel® Xeon® 6 Processors, LGA 4710
- 8-Channel DDR5 RDIMM / MCR DIMM, 16 x DIMMs
- Dual ROM Architecture
- 1 x 1Gb/s LAN port via Intel® I210-AT
- 12 x 2.5" Gen5 NVMe/SATA/SAS-4 hot-swappable bays
- 1 x M.2 slot with PCIe Gen5 x2 interface
- 1 x M.2 slot with PCIe Gen5 x2 interface, shared with SATA support
- 1 x FHHL PCIe Gen5 x16 slot
- 1 x OCP 3.0 Gen5 x16 slot
- 1+1 1300W 80 PLUS Titanium redundant power supplies

Application

Networking, Hybrid/Private Cloud Server...

Specification

Dimensions	1U (W438 x H43.5 x D710 mm)	I/O Ports	Front: 1 x USB 3.2 Gen1 Rear: 2 x USB 3.2 Gen1, 1 x Mini-DP, 1 x RJ45, 1 x MLAN Internal: 1 x TPM header, 1 x PRoT connector, 1 x VROC connector
Motherboard	MS34-DC0	Backplane Board	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
CPU	Intel® Xeon® 6 Processors - Intel® Xeon® 6700E-Series Processors - Intel® Xeon® 6700P-Series Processors - Intel® Xeon® 6500P-Series Processors Single processor, TDP up to 350W	Security Modules	1 x TPM header with SPI interface - Optional TPM2.0 kit: CTM012 1 x PRoT module connector (M.2 M-key) - Optional PRoT module (AST1060 solution): CSC1200
Sock	1 x LGA 4710 (Socket E2)	Power Supply	1+1 1300W 80 PLUS Titanium redundant power supplies AC Input: 100-240V
Chipset	System on Chip	System Management	ASPEED® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	8-Channel DDR5 RDIMM / MCR DIMM, 16 x DIMM slots RDIMM: Up to 6400 MT/s (1DPC), 5200 MT/s (2DPC) MCR DIMM: Up to 8000 MT/s (*MCR DIMMs are only supported with Intel Xeon 6 Processors with P-cores and in a 1DPC configuration.)	System Fans	4 x 40x40x28mm (25,000rpm), 4 x 40x40x56mm (32,000rpm)
LAN	1 x 1Gb/s LAN port (1 x Intel® I210-AT) - supports NCSI function 1 x 10/100/1000 Mbps Management LAN	Operating Properties	Operating temperature: 10°C to 35°C Operating humidity: 8%-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Video	Integrated in ASPEED® AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp	Packaging Content	1 x R164-S32-AAH1 1 x CPU heatsink 1 x Mini-DP to D-Sub cable 2 x Carriers 1 x 2-Section Rail kit
Storage	12 x 2.5" Gen5 NVMe/SATA/SAS-4* hot-swappable bays *SAS card is required to support SAS drives.	Part Numbers	Barebone package: 6NR164S32DR000AAH1* - 2-Section Rail kit (CMA not supported): 25HB2-3A0203-K0R - CPU heatsink: 25ST1-4Z3200-S7R - Mini-DP to D-Sub cable: 25CRN-200801-K1R - Power supply: 25EP0-213005-G1S
RAID	Require RAID add-in cards		
Expansion Slots	1 x FHHL PCIe Gen5 x16 slot 1 x OCP 3.0 Gen5 x16 slot (supports NCSI function) 2 x M.2 slots (M-key, PCIe Gen5 x2, support 2280/22110 cards) - 1 x M.2 slot is shared with SATA support		



Learn more about GIGABYTE server at <https://www.gigabyte.com/Enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* Intel, the Intel logo, Xeon, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.
* All other brands, logos and names are property of their respective owners.

© 2024 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

